



APPROVVIGIONAMENTI INDUSTRIALI S.A.S.

16165 Genova - Via P. Gualco, 56 B/C
Telefono 010 802.630 / 802.460 - Fax 010 803.027
C.C.I.A.A. 286214 - Cod. Fisc. e P. IVA 02634720102
<http://www.apinet.it> - E.mail: info@apinet.it




Submersible Sump Pump 2" Discharge

Submersible pumps have a small cross section and can be lowered into areas having small access hatches. Especially preferred where and electric spark may risk ignition or explosion.



SP-10

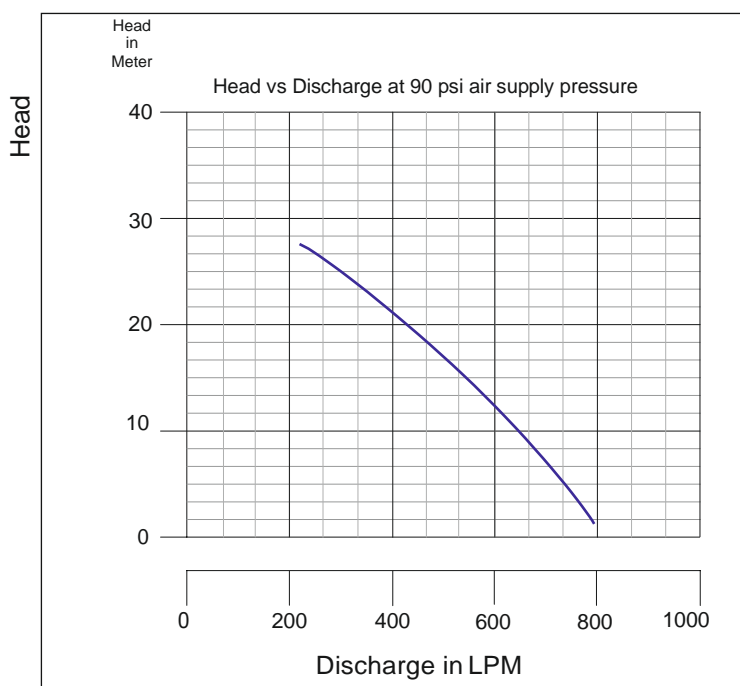

Will pump down to 22mm. will handle up to 3mm solids Governor controlled motor. Compact design enables uses in restricted areas.

Air inlet operated by Ball Valve Lever

- **Construction**
- **De-watering**
- **Engineering industry**
- **Transfer of fluids, usage in sumps for periodic de watering**
- **Marine- emptying ballast tanks, after washing procedure**
- **Draining cargo holds during and after washing procedure**
- **Pumping of sea water from bilges, holds, etc.**

Technical Data

Teryair Part No	Weight	Mini Opening Pump will enter	Air Inlet	Air Outlet	Air Consumption	Fluid Inlet	Fluid Outlet	Air Supply
SP 10	22 Kgs	204mm x 230mm	1" NPT	1" BSPP	2.7m ³ /min	Screen	2" NPT	80-90 PSI